

PERNUMA OFFICE D Electric Date Perforating Machine

This machine is supplied with a complete set of figure slides consisting of 18 pieces in its standard version in order to be able to perforate a 6-digit date (28.01.12).

This model can contain 3 lines with a max. width of 80 mm each, for example a date and a fixed text above or below it.

The standard character heights are 6, 8 or 10 mm.

All perforating machines from our OFFICE series are equipped with an easy-to-exchange block-type-die-unit.

The insertion depth is ca. 42 mm.

Up to 20 sheets of 70 g/m² paper can be perforated in one operation depending on the number of digits. The insertion height is 2 mm.

The perforation is effected by lateral fastened push-buttons. The main switch is at the rear of the machine.

All OFFICE machines can be supplied with a foot switch or a safety lock.

In case of order please always state where on the forms the impression is required so that it appears legible.

PERNUMA OFFICE T Electric Text Perforating Machine

This machine is manufactured with a fixed text of your choice.

This model can contain 3 lines with a max. width of 80 mm.

The standard character heights are 6, 8 or 10 mm.

All perforating machines from our OFFICE series are equipped with an easy-to-exchange block-type-die-unit.


The insertion depth is ca. 42 mm.

Up to 20 sheets of 70 g/m² paper can be perforated in one operation depending on the number of digits. The insertion height is 2 mm.

The perforation is effected by lateral fastened push-buttons. The main switch is at the rear of the machine.

All OFFICE machines can be supplied with a foot switch or a safety lock.

In case of order please always state where on the forms the impression is required so that it appears legible.

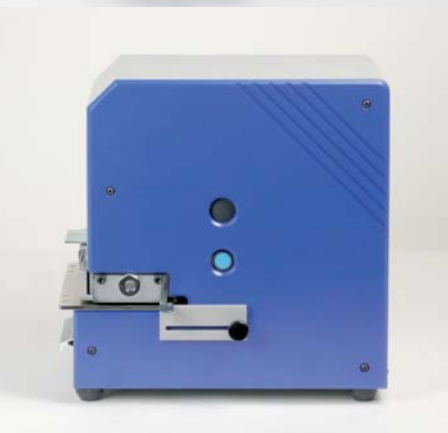

PERNUMA OFFICE D
Electric Date Perforating Machine

PERNUMA OFFICE T
Electric Text Perforating Machine

Technical Data	PERNUMA OFFICE D	Technical Data	PERNUMA OFFICE T
Type of current	230 V / 50 cps special voltage upon request	Type of current	230 V / 50 cps special voltage upon request
Insertion depth	ca. 42 mm	Insertion depth	ca. 42 mm
Weight net / gross	ca. 18 kg / 20.5 kg	Weight net / gross	ca. 18 kg / 20.5 kg
Machine dimensions	ca. 15.4 x 29.0 x 31.5 cm	Machine dimensions	ca. 15.4 x 29.0 x 31.5 cm
Packaging	carton	Packaging	carton
Packaging dimensions	ca. 39 x 33 x 54 cm	Packaging dimensions	ca. 39 x 33 x 54 cm



Figure height 6 mm, pin Ø 0.8 mm



Figure height 8 mm, pin Ø 0.9 mm



Figure height 10 mm, pin Ø 1.1 mm



Figure height 6 mm, pin Ø 0.8 mm



Figure height 8 mm, pin Ø 0.9 mm




Figure height 10 mm, pin Ø 1.1 mm